


Triad™

Seating Capacity.....	3 Adults
Dimensions	84" x 64" x 30 1/2", (213 cm x 170 cm x 78 cm)
Corner Radius.....	16" (41 cm)
Dry Weight.....	530 lbs (241 kg)
Filled Weight (Average Fill)	2,200 lbs (998 kg)
Water Capacity (Average Fill).....	200 US gallons (757 Liters)
Shipping Weight	530 lbs (241 kg)
Export Shipping Weight:.....	580 lbs (263 kg)
Electronic Controls	D1 Hub™ LCD full color control panel; access to control jets, temperature, settings and maintenance schedule
Pump 1.....	North America (60 Hz): 2-Speed, 4.0 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump.....	Yes
Fountain Pump	Yes
Filtration (factory default)	24/7 Filtration (Purge Cycles 2 x 10 minutes)
Total VCR Jets	24
Seat 1 Jets	1 Pillow Mini Rotator, 2 Cluster Shower Directional, 4 Power Storm Rotator, 2 Power Storm Directional, 2 Mini Storm Rotator, 4 Mini Storm Directional
Seat 2 Jets	2 Power Storm Dual Rotator, 1 Power Storm Directional, 2 Mini Storm Directional
Seat 3 Jets	4 Mini Storm Rotator
Massage Selectors	None
Special Features	Tactile Therapy, Spa Status Light, Flex Therapy Pillow, Dynamic Massage Sequencer
Water Management System.....	UltraPure System; Two 75 ft ² filter cartridge; 8" Weir
LED Lighting	Liquid FX
Optional	Exterior Lights
Synthetic Cabinet Colors	Adobe Tan, Stoneridge Grey, Mayan Brown
Terracina Cabinet (Optional).....	Driftwood, Cherry, Summer Pine, Vintage Cedar, Midnight Maple
Acrylic Colors	Moonstone, UltraLife, Sand, Sunstone, Smoked Marble, Blue Topaz, Gray Marble, Desert Stone
Headrests	3 (2 Standard, 1 Flex Therapy Pillow)
Water Feature.....	Fountain with independent flow rate (on or off) adjustment; powered by the fountain pump
Heater	2.1, 3.4, 5.5 kW
Export (50Hz)	2.1, 3.4, 5.5 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@30A, 40A or 50A Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs
Warranty*.....	North America (60 Hz): Lifetime for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, Lifetime for EnviroTect Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo
Audio System (Optional).....	Fully Integrated Stereo System with Bluetooth capability, 4 premium speakers and a subwoofer
Wi-Fi (Optional).....	D1 Connect App

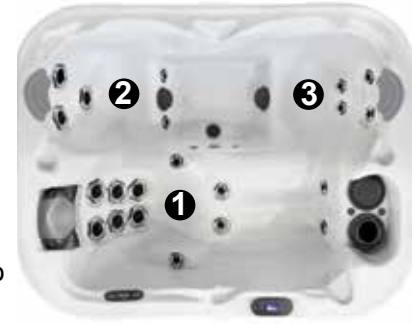


**Optional
escutcheon jets**

*(See Warranty Document for Specific Details)

Triad

Massage Selector Diagram

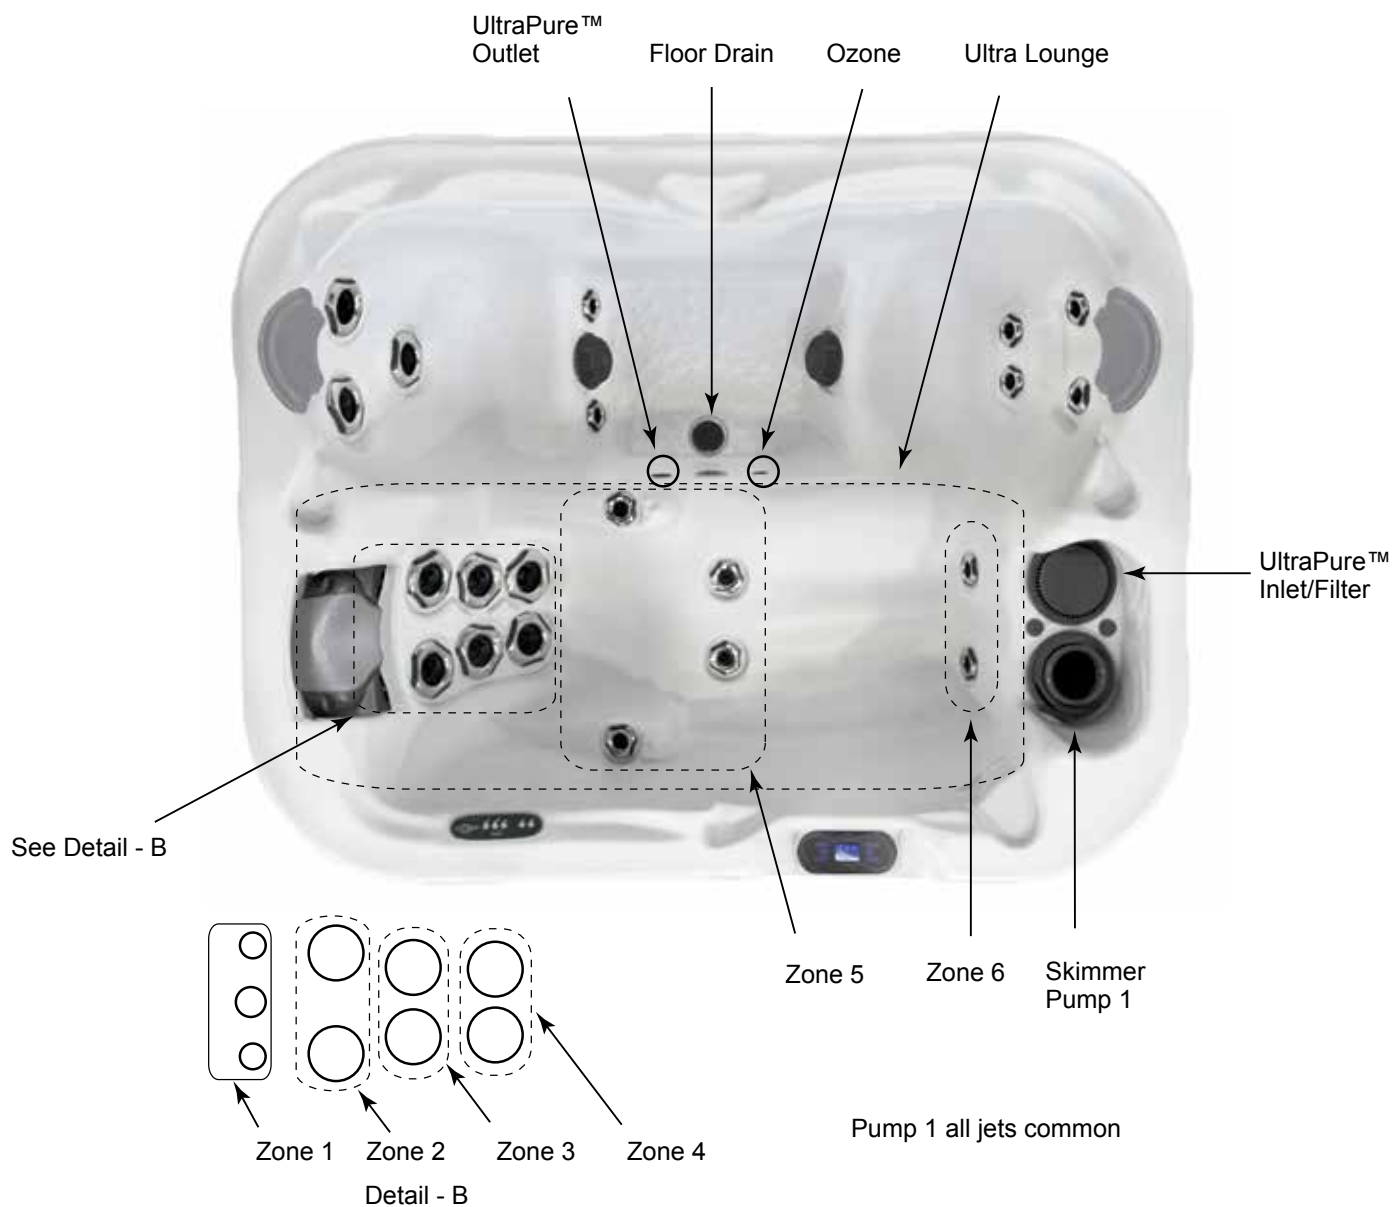

Spa Operation Subject to Change without Notice

Seat Depths

- 1 = 25.00" (63.50 cm)
- 2 = 26.00" (66.04 cm)
- 3 = 26.00" (66.04 cm)
- 4 = 27.00" (68.58 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Triad

Jet Designation

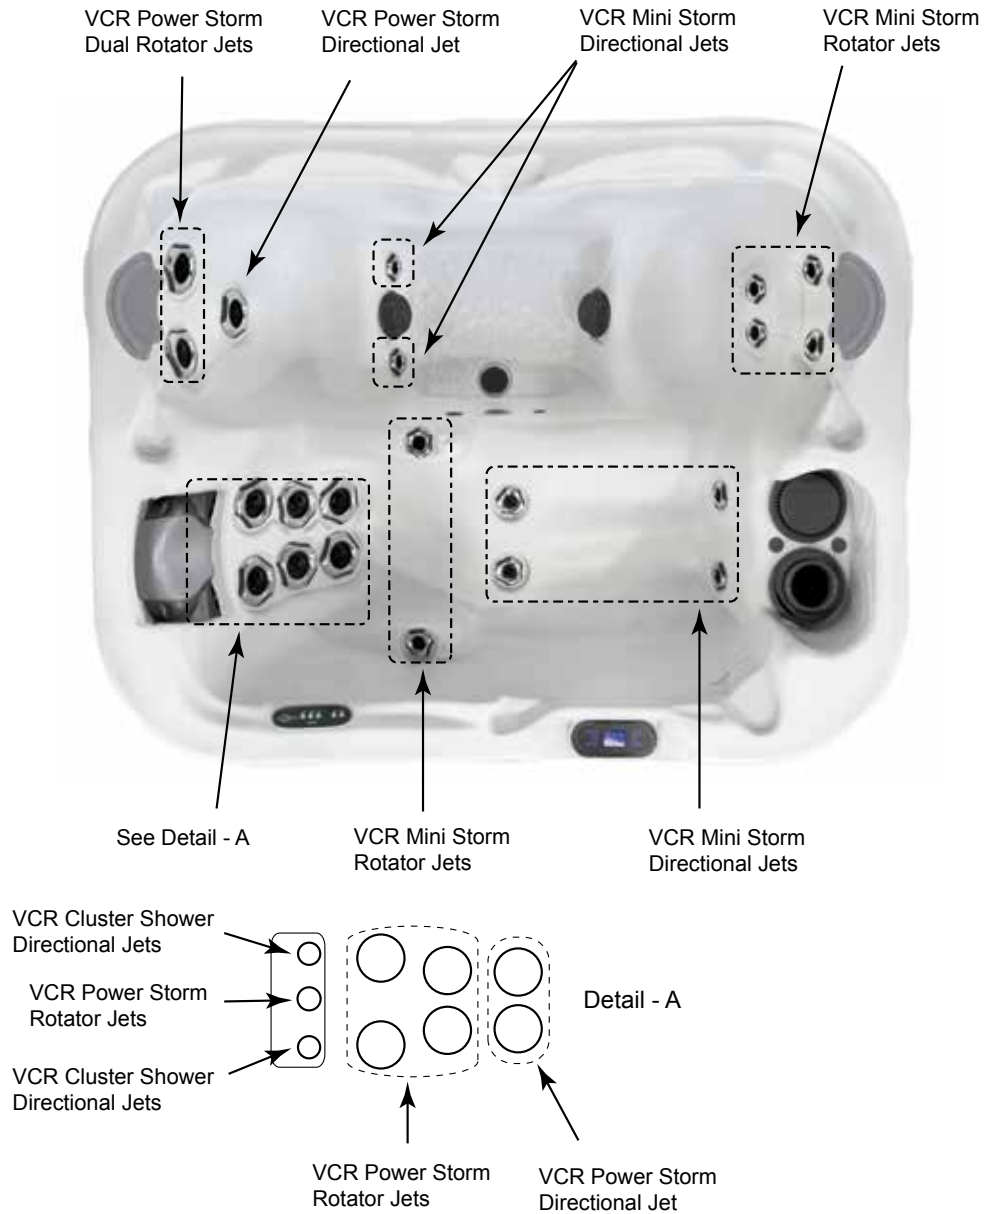

Dimensions/Operation/Specifications are Subject to Change Without Notice

24 Total Jets



Mini
Storm
Rotator
(6)



Mini
Storm
Directional
(6)



Power
Storm
Rotator
(4)



Power
Storm
Directional
(3)



Power
Storm Dual
Rotator (2)



Flex Therapy
Pillow (2)





Cluster
Shower
Directional
(2)



Mini
Storm
Rotator
(1)


Total Jets

Triad

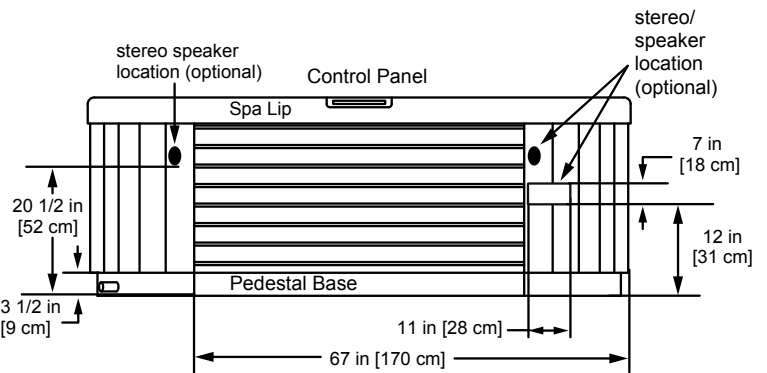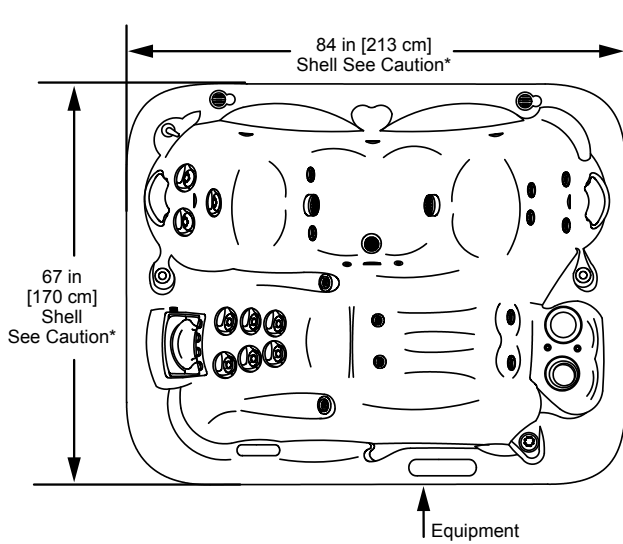

*Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**

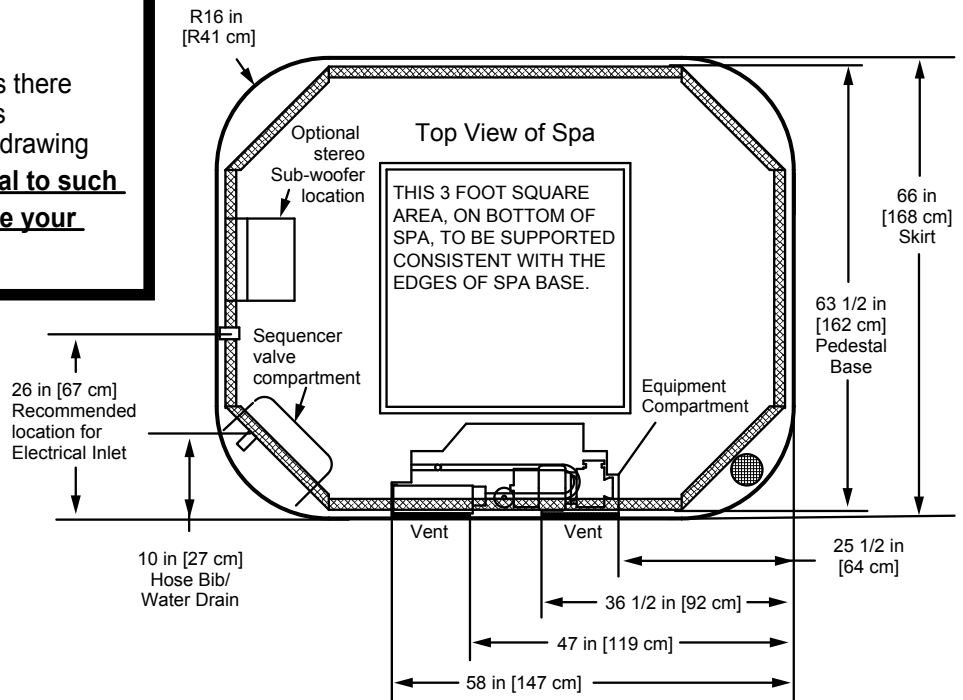

- Note:**
1. Engineering specs may differ slightly from brochure.
 2. For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
 3. Alternative cabinets may add significant weight. Ask your dealer for exact details
 4. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

Dimensions/Specifications are Subject to Change Without Notice (Tolerance $\pm 0.5"$ [1.27 cm]).